

Technical data sheet

AX 20 cable routing trunking, trunking width 50, with partition

Item number: 6131614



Cable trunking Axis Mini for covered cable routing in internal areas.
Trunking base with base perforation for direct mounting on the wall partition to install different voltage levels.
Base and cover as set.



PVC Polyvinylchloride

Master data		
Item number	6131614	
Type	AX 5020 CL blc	
Description 1	Cable trunking	
Description 2	AXIS MINI Set 20x50 TW 9010	
Manufacturer	OBO	
Colour	Pure white; RAL 9010	
Material	Polyvinylchloride	
Smallest sales unit	44	
Unit of quantity	Metre	
Weight	31 kg	
Weight unit	kg/100 m	
CO2 Footprint (GWP) Cradle-to-Gate	0,5372 kg COe / 1 Meter	


Technical data sheet

AX 20 cable routing trunking, trunking width 50, with partition

Item number: 6131614



Dimensions

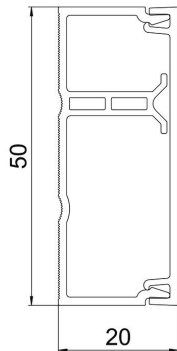

Length	2,000 mm
Width	50 mm
Height	20.1 mm

Technical data

Number of fixed partitions	1
Number of insertable partitions	0
Version, cable trunking cover	Loose
Fastening type	Base perforation
Maintain electrical functions	no
Halogen-free	no
Cable retaining clip	no
Duct connector	no
Delivery on a roll	no
Usable cross-section	690 mm ²
Protection rating	IP40
Protective film	no
Protection rating IK code	IK07.
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C
Transparent	no