

# Technical data sheet

## Device installation trunking Signa Base 70110

Item number: 6132721



Trunking base of the Signa Base device installation trunking for covered cable routing and device installation in internal areas. The scope of delivery contains two trunking couplings.

Trunking base with base perforation for direct mounting on the wall. Direction changes with the fittings and close the trunking ends with end pieces.

Tested according to DIN EN 50085-1 and DIN EN 50085-2-1.

Order the base and cover separately.



**PVC** Polyvinylchloride

### Master data

Item number	6132721
Type	BRK 70110 cws
Description 1	Device installation trunking
Description 2	SIGNA BASE 70x110 9001
Manufacturer	OBO
Colour	Cream; RAL 9001
Material	Polyvinylchloride
Smallest sales unit	2
Unit of quantity	Metre
Weight	117.35 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	2,4613 kg CO2e / 1 Meter


# Technical data sheet

## Device installation trunking Signa Base 70110

Item number: 6132721



### Dimensions

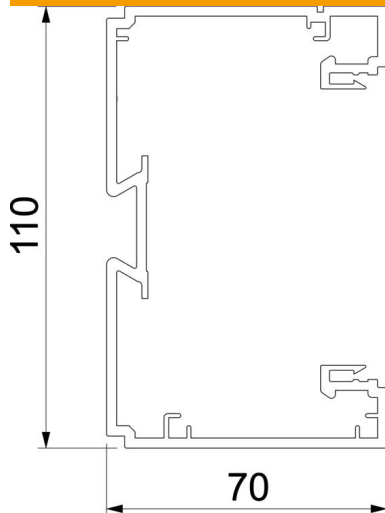

Length	2,000 mm
Width	110 mm
Height	70 mm

### Technical data

Number of covers	1
Number of insertable partitions	1
Rear panel version (inner side)	Continuous DIN rail
Rectangular shape	yes
Halogen-free	no
Cable retaining clip	no
Duct connector	yes
Cover mounting type	Internal
Mounting perforation in base	yes
Usable cross-section	6036 mm <sup>2</sup>
Cover supplied	no
Cover width	79 mm
Protection rating	IP40
Protective film	yes
Protection rating IK code	IK07.
Symmetrical	no
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C