

# Technical data sheet

End piece, for device installation trunking Rapid 80 type 70130

Item number: 6274574



End piece for closing the device installation trunking.



Polycarbonate/Acrylnitrile-butadiene-styrene

| Master data                        |                                              |  |
|------------------------------------|----------------------------------------------|--|
| Item number                        | 6274574                                      |  |
| Type                               | GK-E70130WA                                  |  |
| Description 1                      | End piece                                    |  |
| Manufacturer                       | OBO                                          |  |
| Dimension                          | 70x130mm                                     |  |
| Colour                             | White aluminium; RAL 9006                    |  |
| Material                           | Polycarbonate/Acrylnitrile-butadiene-styrene |  |
| Smallest sales unit                | 1                                            |  |
| Unit of quantity                   | Piece                                        |  |
| Weight                             | 5.4 kg                                       |  |
| Weight unit                        | kg/100 pc.                                   |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2827 kg CO2e / 1 Piece                     |  |


# Technical data sheet

End piece, for device installation trunking Rapid 80 type  
70130

Item number: 6274574



## Dimensions

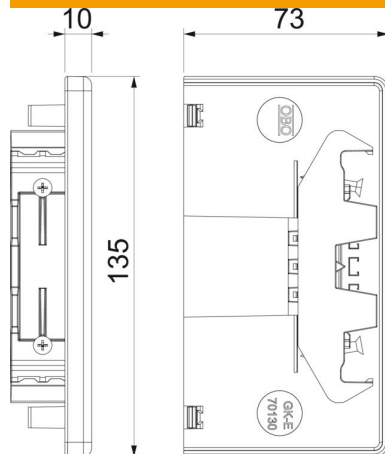

|        |        |
|--------|--------|
| Length | 29 mm  |
| Width  | 135 mm |
| Height | 73 mm  |

## Technical data

|                                      |             |
|--------------------------------------|-------------|
| Version for                          | Symmetrical |
| Fastening type                       | Screw-on    |
| for duct width                       | 130 mm      |
| for trunking height                  | 70 mm       |
| Suitable for                         | Left/right  |
| Halogen-free                         | no          |
| Cut lamination                       | yes         |
| Protection rating                    | IP30        |
| Protective film                      | yes         |
| Protection rating IK code            | IK08        |
| Permitted temperature range,<br>max. | 60 °C       |
| Permitted temperature range,<br>min. | -15 °C      |