


Technical data sheet

Support cable for cable trays, galvanic

Item number: 1450301

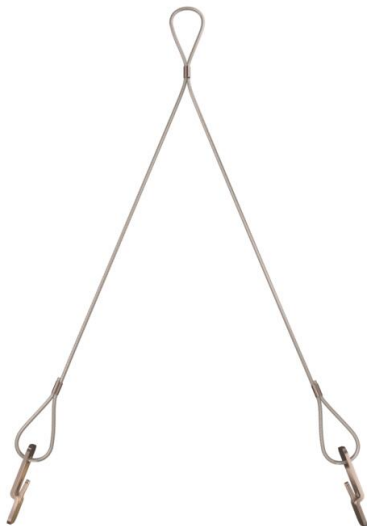

Y suspension for the suspension of perforated cable trays. Suitable for indoor use.

The operating load is stated with a safety factor of 5:1. The break load is 5x greater than the operating load. In combination with the universal bracket for mesh cable trays (QW GRH) or for cable trays (QW KRH), the safety factor is 1.7 according to IEC 61537 – Guide systems for cables.

St	Steel
G	Electrogalvanized

Master data

Item number	1450301
Type	QWT KR 2 200 G
Description 1	Suspension wire
Description 2	for cable tray
Available from	15.04.2021
Manufacturer	OBO
Dimension	2x2x300mm
Material	Steel
Surface	Electrogalvanized
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	1
Unit of quantity	Piece
Weight	6.45 kg
Weight unit	kg/100 pc.


Technical data sheet

Support cable for cable trays, galvanic

Item number: 1450301



Dimensions

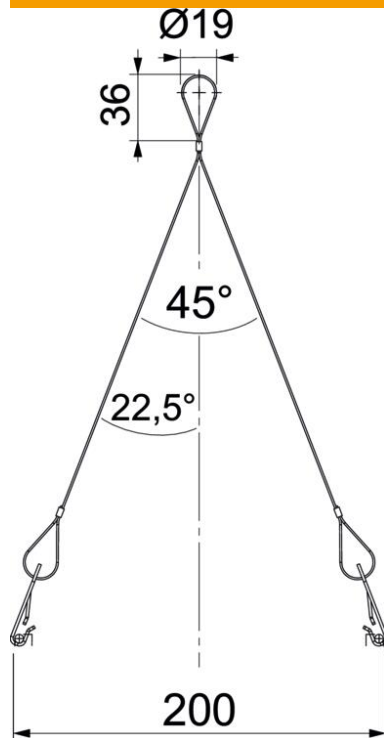

Dimension B	200 mm
Dimension H	292 mm

Technical data

Operating load	45 kg
Breaking load	2.25 kN
Cable diameter	2 mm
Support load	450 N
Angle α	22.5
Angle β	45