

Technical data sheet

UTC3 W with 3 protective contact sockets, white

Item number: 7404611



The ready-for-connection UTC3 universal support possesses 3 pre-installed 33° protective contact sockets in white of 16 A. Suitable for VL connection cables and device installation units of nominal size 2, 4, R4, 6 and R7.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI.
The ready-for-connection UTC3 universal support has 3 pre-installed 33° protective contact sockets in white with 16 A.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI

PA Polyamide

Master data		
Item number	7404611	
Type	UTC3 W W3	
Description 1	Universal supportConnectWINSTA	
Description 2	triple white	
Manufacturer	OBO	
Dimension	165x76x45	
Material	Polyamide	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	29.9 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	1,0095 kg CO2e / 1 Piece	

Technical data sheet

UTC3 W with 3 protective contact sockets, white


Item number: 7404611



Dimensions



Length	175 mm
Width	76 mm
Height	60 mm

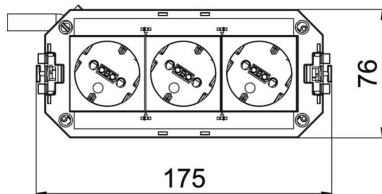

Technical data

Connection cable, halogen-free	no
Number of installable devices	3
Version for	Triple pure white
Cable length	300 mm
Line cross-section	2.5 mm ²
Plug-in system	WINSTA® MIDI
Plug connector system, system-specific	yes
Circuit	1
System length	165 mm
Surge protection	no