

# Technical data sheet

Flat angle, trunking type WDK 80170

Item number: 6182764



Flat angle for changing the direction of the WDK trunking.



**PVC** Polyvinylchloride

## Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 6182764                 |
| Type                               | WDK F80170GR            |
| Description 1                      | Flat angle              |
| Manufacturer                       | OBO                     |
| Dimension                          | 470x170x80              |
| Colour                             | Stone grey; RAL 7030    |
| Material                           | Polyvinylchloride       |
| Smallest sales unit                | 1                       |
| Unit of quantity                   | Piece                   |
| Weight                             | 170 kg                  |
| Weight unit                        | kg/100 pc.              |
| CO2 Footprint (GWP) Cradle-to-Gate | 6,079 kg CO2e / 1 Piece |


# Technical data sheet

Flat angle, trunking type WDK 80170

Item number: 6182764



## Dimensions

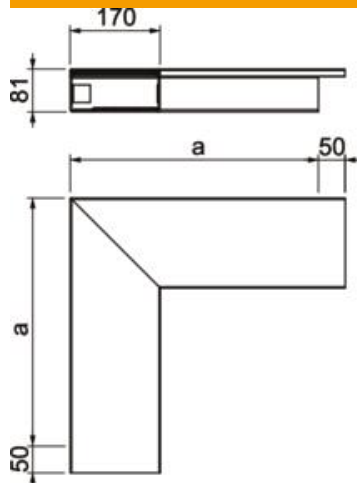

|             |        |
|-------------|--------|
| Length      | 470 mm |
| Width       | 170 mm |
| Height      | 80 mm  |
| Dimension a | 470 mm |

## Technical data

|                                   |                  |
|-----------------------------------|------------------|
| Version for                       | Base and cover   |
| Fastening type                    | Base perforation |
| Maintain electrical functions     | no               |
| for duct dimension                | 80 x 170         |
| Halogen-free                      | no               |
| Trunking depth                    | 80 mm            |
| Protection rating                 | IP30             |
| Protective film                   | no               |
| Protection rating IK code         | IK04             |
| Permitted temperature range, max. | 60 °C            |
| Permitted temperature range, min. | -5 °C            |
| Angle range, max.                 | 90 mm            |
| Angle range, min.                 | 90 mm            |